



## Common Name

Range	Evolution
Retail Price Band	Under \$500
Requires	

## Electrical Characteristics

Frequency Response	40Hz - 18kHz
Output Sensitivity	1.8mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	350Ω
Recommended Load	1kΩ
Powering	
Supply Current	
Alternative Powering	

## Switchable Options

Pad	
Filter/EQ	

## Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Haematite steel blue
Weight	60g (2.11oz)
Length	59mm (2.32")
Min Diameter/Width	
Max Diameter/Width	33mm (1.29")
Depth	

Especially suitable for use with drums and brass instruments, the e604 has a reinforced glass fibre body, low sensitivity to impact and handling noise, very high sound pressure level handling capability, and low distortion. It also features a hum compensating coil and integral stand mount. The frequency response is tailored for close miking (proximity effect).

## Accessories

Included	Pouch, drum clip
Optional	

Frequency curve: Cardioid

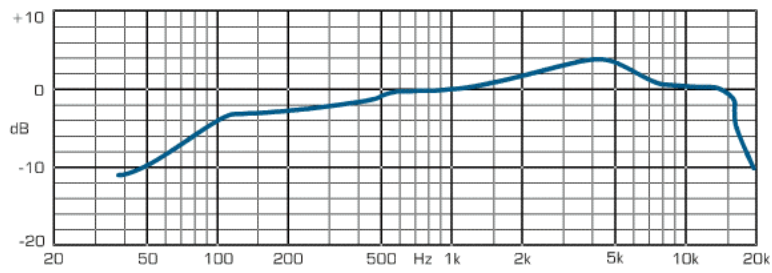

Polar curve: Cardioid

